

WLB

WLB series compact bench scale



Bench scales with compact dimensions, extremely sturdy, constructed with high quality materials. Suitable for industrial laboratories and burdensome working environment. Fitted with standard weight and rapid calibration adjustment function. Multifunctional weighing programme. CE-M approvable according to EN45501.

BENCH SCALES: MAIN FEATURES

- Special body in anodised alloy, resistant and easy to clean.
- Loading surface in anodised alloy, washable and inspectionable.
- Safety limit switch and protection plate against side strikes.
- Aluminium load cell, IP68.
- Extractable calibration weight, useful for calibration control.
- Integrated weight indicator, with backlit LCD display of 25mm, waterproof keypad and multifunctional programme.
- Non-slip adjustable feet.
- Integrated level.
- IP68 protection degree.
- Serial port RS232 for connection to Pc or printer.
- Power supply through built-in rechargeable battery. Fitted with external battery charger with IP68 connector(to not use as power adaptor).
- Dimensions and weight:
 - Scale: (lwxh) 360x210x75mm - 5,3kg.
 - Packaging: (lwxh) 500x300x150mm - 6,6kg.
- Patented product.

BENCH SCALES: FUNCTIONING MODES

- Through the specific key, the desired functioning mode can be chosen:
- SELECTABLE FUNCTIONS:
 - x 10 high resolution visualisation.
 - Precision weighing with recalibration through standard weight (for the company internal use).
 - Switch Net/Gross
 - lb to kg or free factor conversion.
 - Weight totalisation.
 - Formulation.
 - +/- check.
 - Percentage weigh.
 - Approved weight transmission to PC/PLC or printer.
 - Pieces counting.
 - Hold
- OTHER STANDARD FUNCTIONS:
Zeroing, Tare, preset Tare, automatic Tare, Auto switch off.


DETAIL 1



DETAIL 2



DETAIL 3

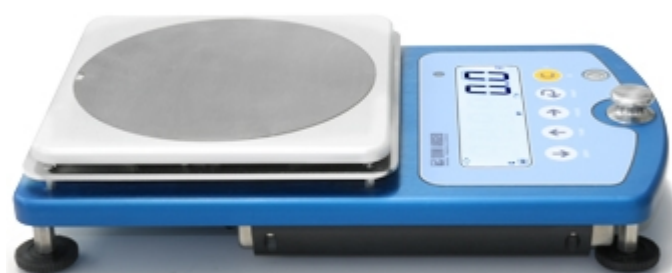

VERSIONS

Available versions

Codice	Classe	Piatto Max (mm)	Max (g)	d (g)	<div>M</div> (g)*	d HR (g)*	Linearità (g) +/-	Ripetibilità (g)
WLB6M	III	190x190 mm	6000	--	1	0.1	1	1

(* M) Legal for trade approved as standard

(* d HR) High resolution digit is active as standard, it can be disabled by the configuration menu.



MASSAMATIC PTY LTD

13 BOOMPIES STREET - 7500 - PAROW-EAST - SOUTH AFRICA

Tel. 0027-219302510

Fax. 0027-219398488

E-mail sales@massamatic.com

Web www.massamatic.com